

Step 1 Driver





Step 2 Datebase

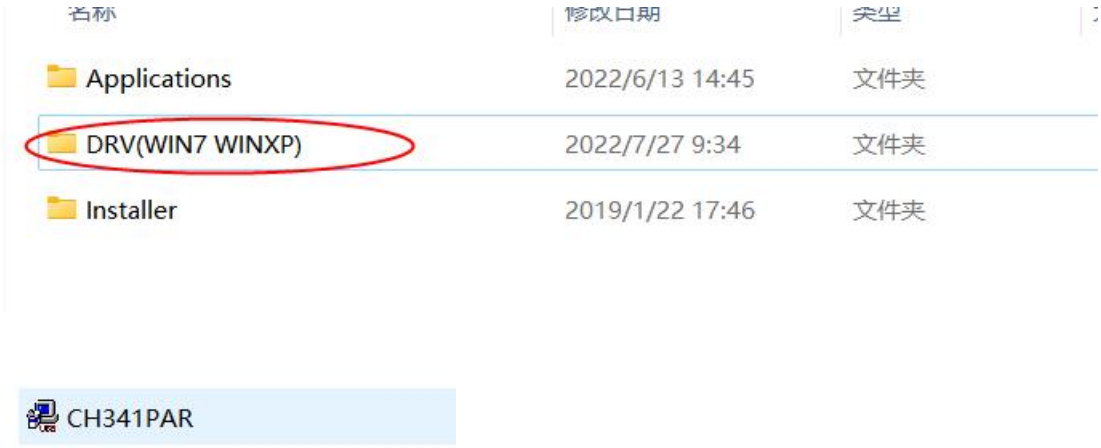



目标目录
选择主安装目录。

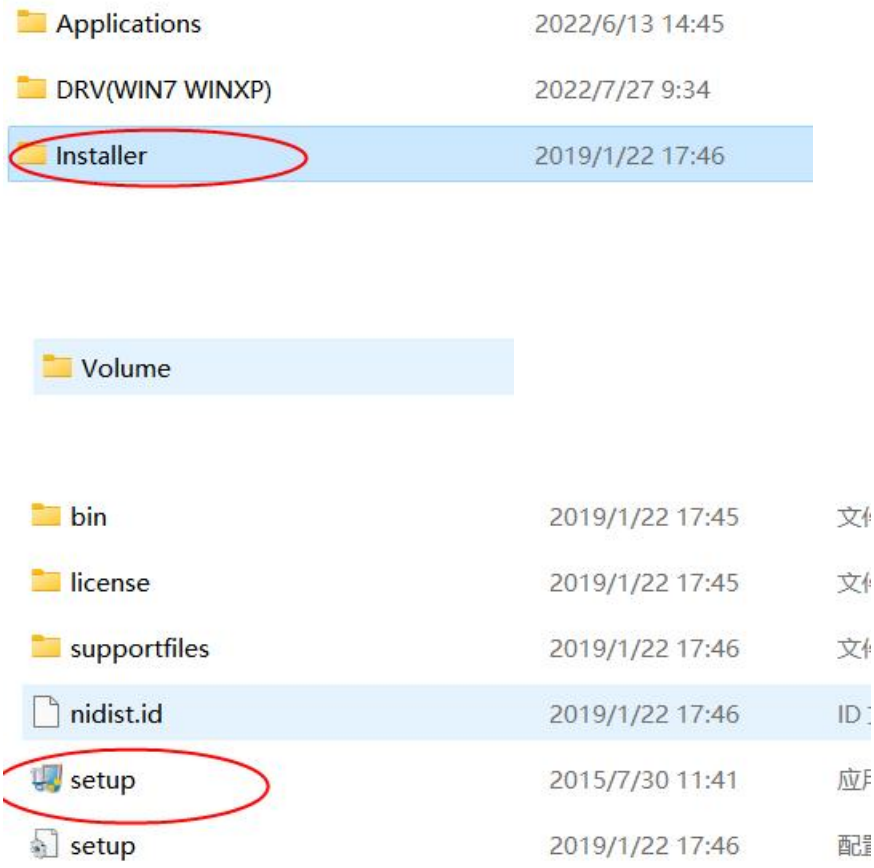


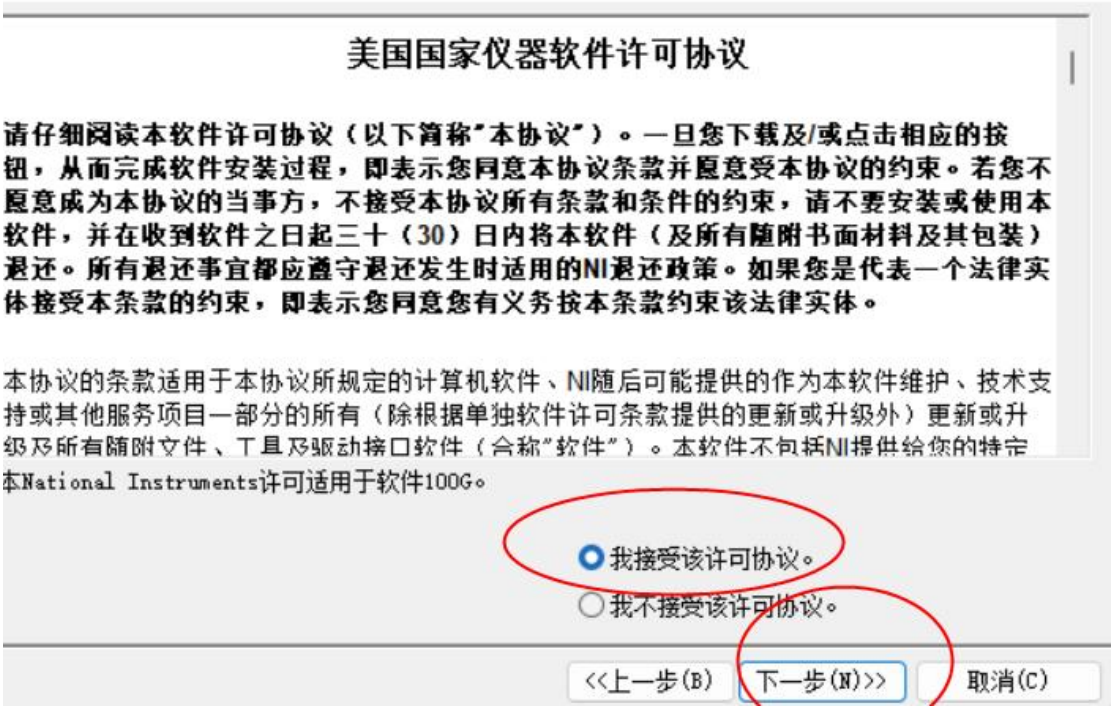

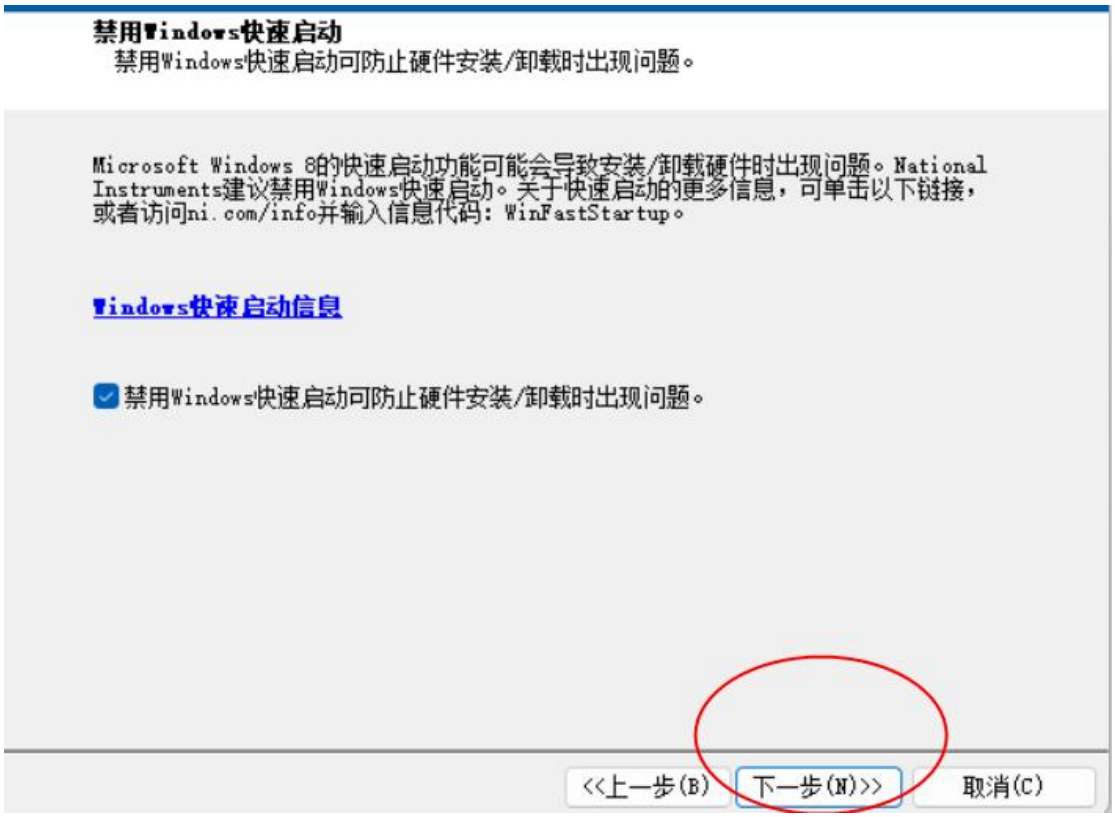
禁用Windows快速启动
禁用Windows快速启动可防止硬件安装/卸载时出现问题。
Microsoft Windows 8的快速启动功能可能会导致安装/卸载硬件时出现问题。National Instruments建议禁用Windows快速启动。关于快速启动的更多信息，可单击以下链接，或者访问ni.com/info并输入信息代码：WinFastStartup。
Windows快速启动信息
禁用Windows快速启动可防止硬件安装/卸载时出现问题。
<<上一步(B)
下一步(N)>>
取消(C)

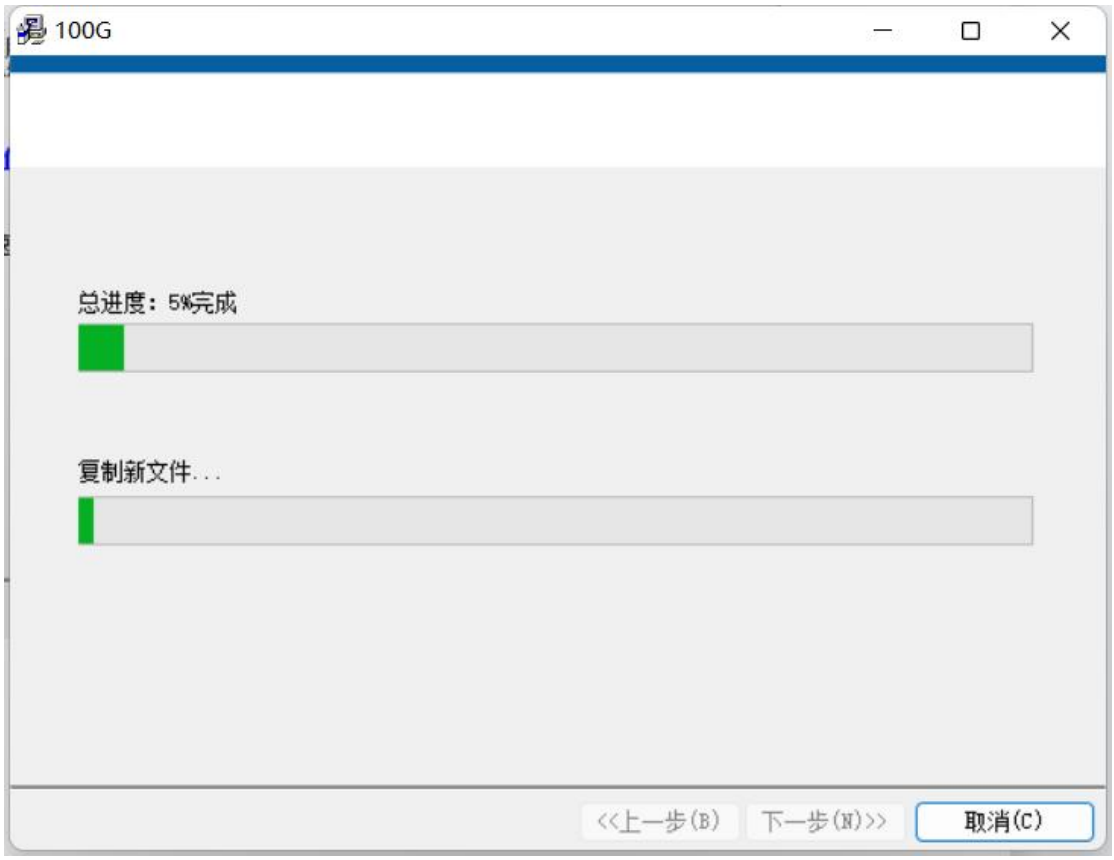

100G
总进度：5%完成
复制新文件...
<<上一步(B)
下一步(N)>>
取消(C)

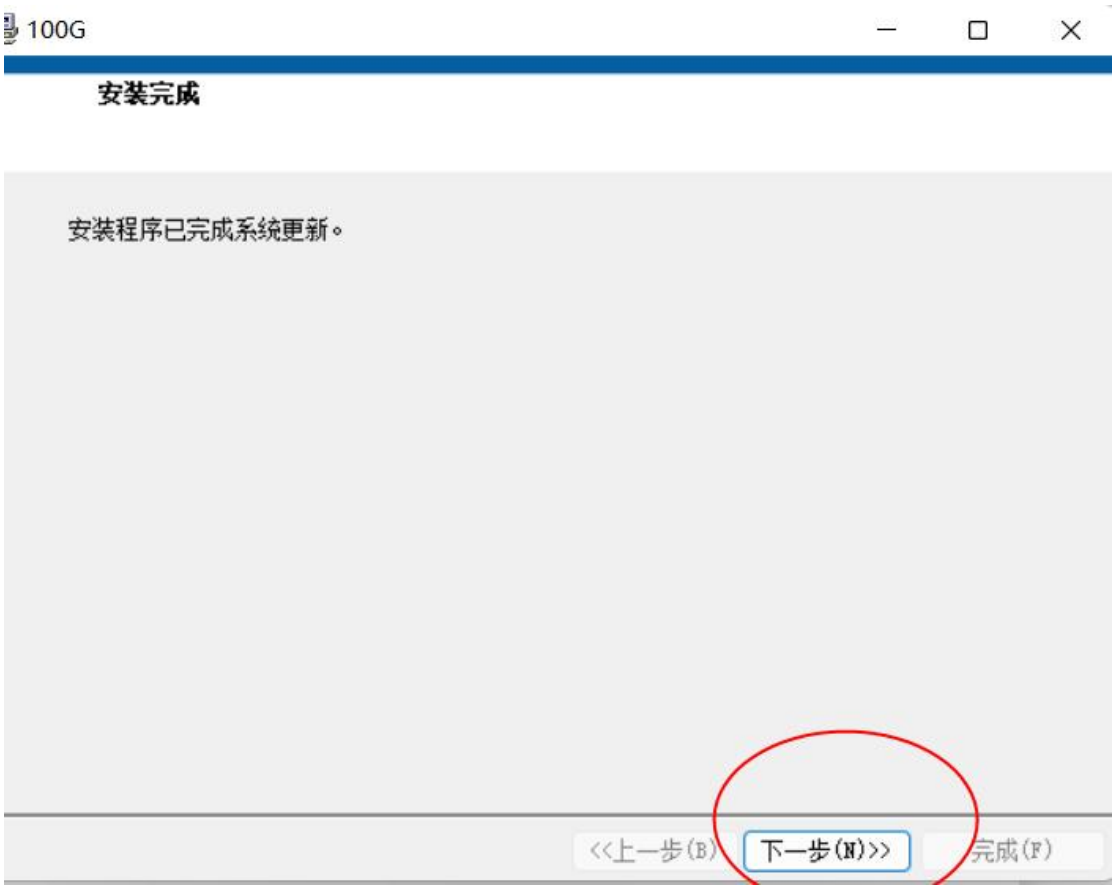
100G
安装完成
安装程序已完成系统更新。
<<上一步(B)
下一步(N)>>
完成(F)

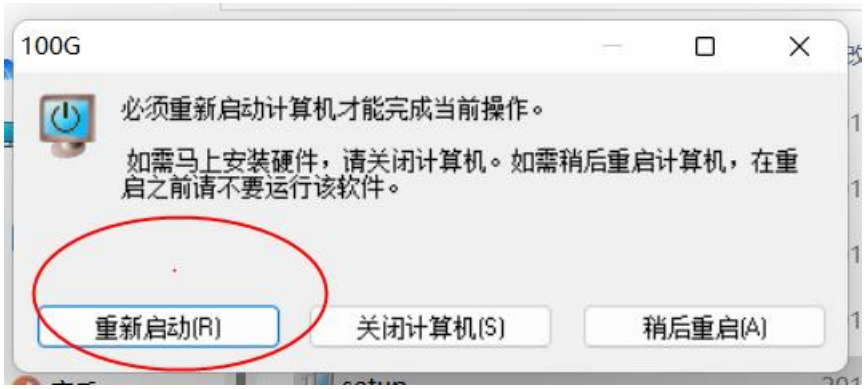
100G
必须重新启动计算机才能完成当前操作。
如需马上安装硬件，请关闭计算机。如需稍后重启计算机，在重启之前请不要运行该软件。
重新启动(R)
关闭计算机(S)
稍后重启(A)


SFP / SFP+ /SFP 16G / SFP25G / SFP32G

名称	修改日期	类型	大小
data	2019/1/22 17:47	文件夹	
log	2020/11/13 18:24	文件夹	
QSFP+(EA)	2019/1/18 16:17	应用程序	1,053 KB
QSFP+(EA)	2019/1/18 16:19	配置设置	1 KB
QSFP+(EA)	2019/1/21 18:01	WinRAR 压缩文件	946 KB
SFP+(EA)	2022/6/13 14:42	应用程序	1,117 KB
SFP+(EA)	2022/6/13 14:45	配置设置	1 KB
应用程序.aliases	2019/1/18 16:17	ALIASES 文件	1 KB
应用程序	2019/1/18 16:17	配置设置	1 KB

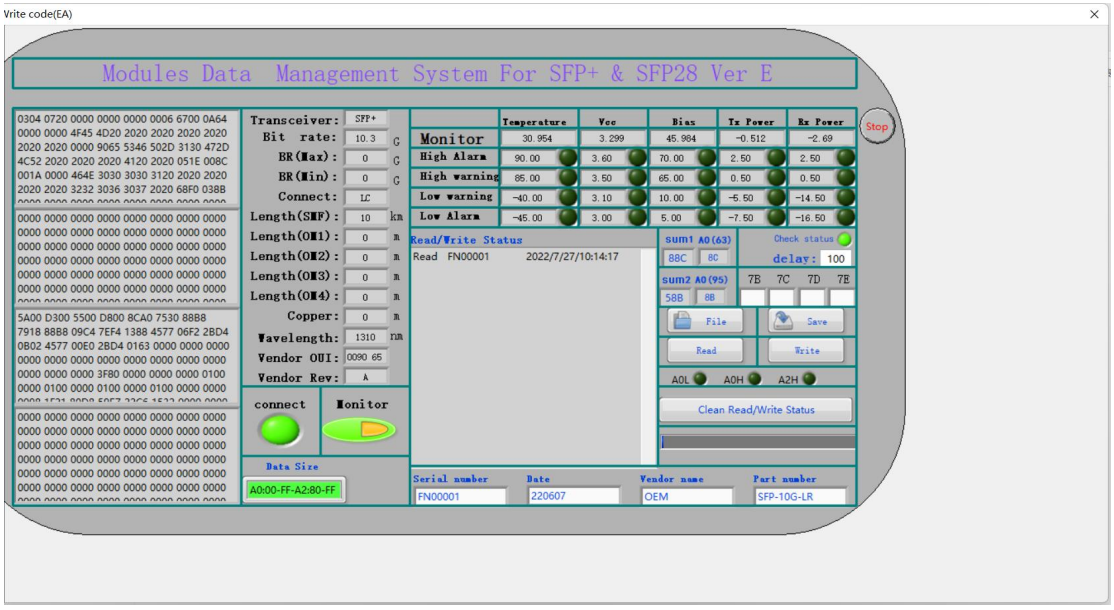


QSFP 40G　QSFP 50G　QSFP28　100G

data	2019/1/22 17:47	文件夹	
log	2020/11/13 18:24	文件夹	
QSFP+(EA)	2019/1/18 16:17	应用程序	1,053 KB
QSFP+(EA)	2019/1/18 16:19	配置设置	1 KB
QSFP+(EA)	2019/1/21 18:01	WinRAR 压缩文件	946 KB
SFP+(EA)	2022/6/13 14:42	应用程序	1,117 KB
SFP+(EA)	2022/6/13 14:45	配置设置	1 KB
应用程序.aliases	2019/1/18 16:17	ALIASES 文件	1 KB
应用程序	2019/1/18 16:17	配置设置	1 KB

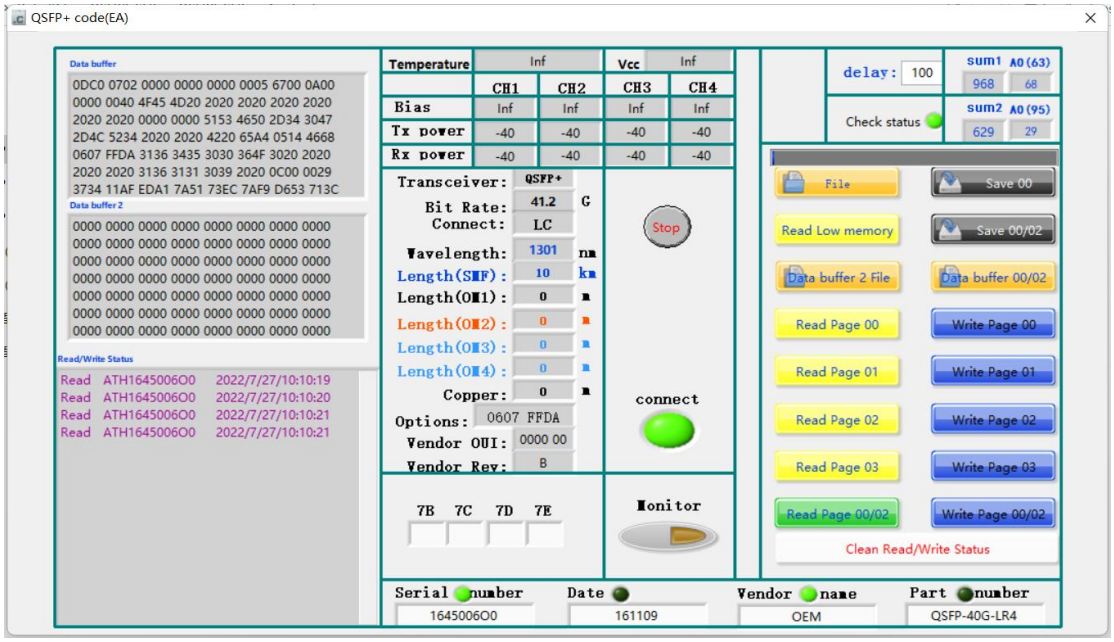

XFP

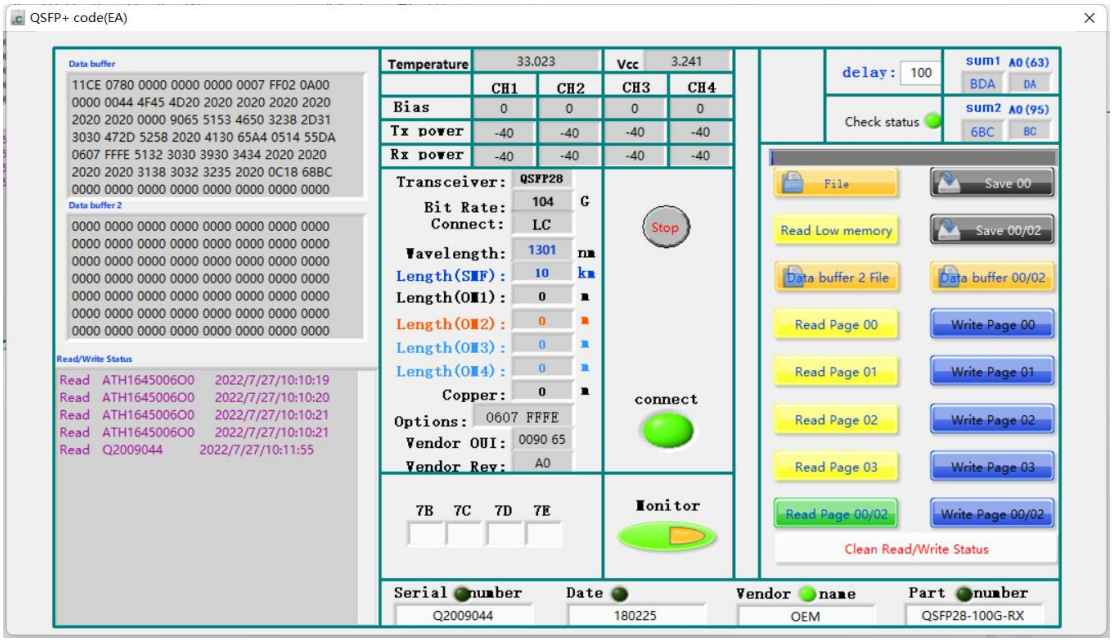
QSFP+ code(EA)
Data buffer
11CE 0780 0000 0000 0000 0007 FF02 0A00
0000 0044 4F45 4D20 2020 2020 2020 2020
2020 2020 0000 9065 5153 4650 3238 2D31
3030 472D 5258 2020 4130 65A4 0514 55DA
0607 FFFE 5132 3030 3930 3434 2020 2020
2020 2020 3138 3032 3235 2020 0C18 68BC
0000 0000 0000 0000 0000 0000 0000 0000
Data buffer 2
0000 0000 0000 0000 0000 0000 0000 0000
0000 0000 0000 0000 0000 0000 0000 0000
0000 0000 0000 0000 0000 0000 0000 0000
0000 0000 0000 0000 0000 0000 0000 0000
0000 0000 0000 0000 0000 0000 0000 0000
0000 0000 0000 0000 0000 0000 0000 0000
0000 0000 0000 0000 0000 0000 0000 0000
Read/Write Status
Read ATH1645006O0 2022/7/27/10:10:19
Read ATH1645006O0 2022/7/27/10:10:20
Read ATH1645006O0 2022/7/27/10:10:21
Read ATH1645006O0 2022/7/27/10:10:21
Read Q2009044 2022/7/27/10:11:55
Temperature 33.023
Vcc 3.241
CH1 CH2 CH3 CH4
Bias 0 0 0 0
Tx power -40 -40 -40 -40
Rx power -40 -40 -40 -40
Transceiver: QSFP28
Bit Rate: 104 G
Connect: LC
Wavelength: 1301 nm
Length(SMF): 10 km
Length(OM1): 0 m
Length(OM2): 0 m
Length(OM3): 0 m
Length(OM4): 0 m
Copper: 0 m
Options: 0607 FFFE
Vendor OUI: 0090 65
Vendor Rev: A0
7B 7C 7D 7E
Stop
connect
Monitor
delay: 100
Check status
sum1 A0(63)
BDA DA
sum2 A0(95)
6BC BC
File
Save 00
Read Low memory
Save 00/02
Data buffer 2 File
Data buffer 00/02
Read Page 00
Write Page 00
Read Page 01
Write Page 01
Read Page 02
Write Page 02
Read Page 03
Write Page 03
Read Page 00/02
Write Page 00/02
Clean Read/Write Status
Serial number
Q2009044
Date
180225
Vendor name
OEM
Part number
QSFP28-100G-RX